

MR200SHUP

PRODUCT FEATURE SUMMARY


DATE: 13.02.2023

Username: mathias nielsen

MODEL TYPE: MR200SHUP

CNSORDERNO (Order number)	MR200SHUP
MF (Mounting Flange)	omit: Oval mount, two holes
ONB (Option (needle bearings))	omit: none
PT (Port type)	omit: Side ports
DC (Displacement code)	200: 199,8 cm³/rev [12.19 in³/rev]
SE (Shaft Extensions)	SH: ø25,32 splined BS 2059 (SAE 6B)
SSV (Shaft Seal Version)	U: High pressure shaft seal (without check valves)
DP (Drain Port)	omit: with drain port
P (Ports)	omit: BSPP (ISO 228)
SFMS (Special Features Measure speed)	omit: no special features
SFGWS (Special Features of gear wheel set)	omit: no special features
SFDR (Special Features - Direction of rotation)	omit: Standard
OP (Option (Paint))	P: Paint
INFO (Info)	PDF CAtalog
L (mm)	162,6
L1 (mm)	34,8

DATA SHEET



Type			Type		
Displacement, cm³/rev [in³/rev]		199,8 [121.9]			
Max. Speed, [RPM]	cont.	300	Max. Inlet Pressure, bar [PSI]	cont.	175 [2540]
	Int.*	375		Int.*	200 [2900]
Max. Torque, daNm [lb-in]	cont.	38,5 [5410]		peak**	225 [3260]
	Int.*	46 [4070]	Max. Return Pressure with Drain Line bar [PSI]	cont.	175 [2540]
Max. Output, kW [HP]	cont.	9 [12]		Int.*	200 [2900]
	Int.*	12 [16.1]		peak**	225 [3260]
Max. Pressure Drop, bar [PSI]	cont.	140 [2030]	Pressure with Unloaded Shaft, bar [PSI]		5 [73]
	Int.*	175 [2540]	Min Starting Torque, daNm [lb-in]	at max. press. drop cont.	33 [2920]
Max. Oil Flow, [RPM]	cont.	60 [15.9]		at max. press. drop Int.*	40 [3540]
	Int.*	75 [19.8]	Min. Speed***, [RPM]		10
			Weight, kg [lb]		8 [17.6]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.

** Peak load: the permissible values may occur for max. 1% of every minute.





*** For speeds lower than given, consult factory or your regional manager.

- Intermittent speed and intermittent pressure drop must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 20/16. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP (DIN51524) or HM (ISO 6743/4). If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm²/s [70 SUS] at 50°C [122°F].
- Recommended maximum system operating temperature is 82°C [180°F].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

MR200SHUP

3d generated view

To see model in 3D you should use Acrobat Reader with enable 3D view

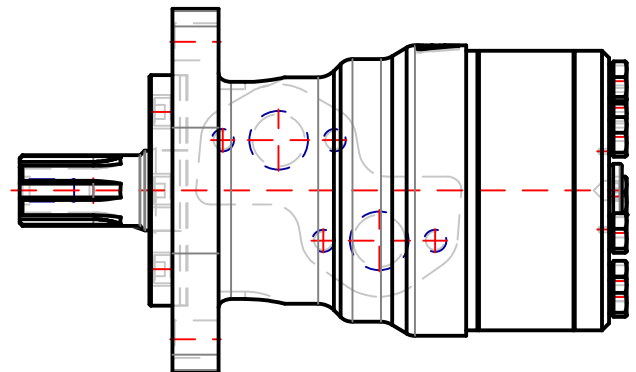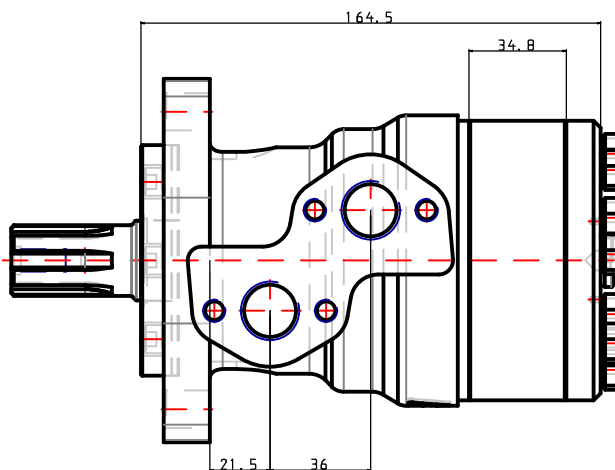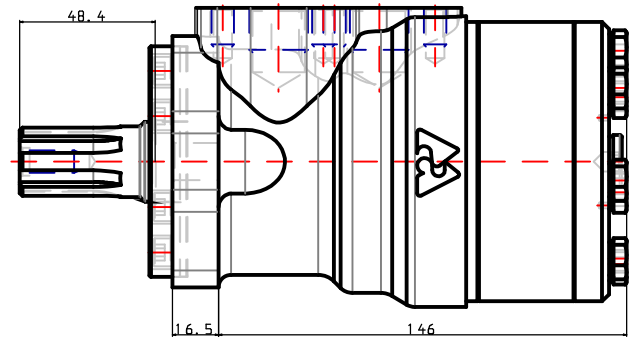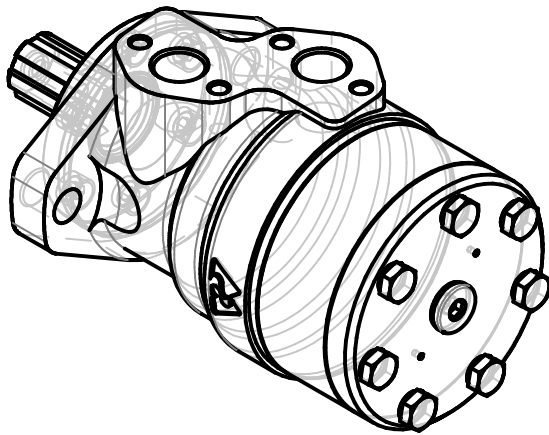

NOTE: Showed dimensions are in nominal, for maximal values see table.

NOTE: For additional dimensions and information about flange , shaft , endcover , etc. see next page.

L max	LS max
162.6	

Confidential property of M+S Hydraulic, Bulgaria.
Please note that this drawing is automatically generated based on the selection. In case of possible changes or revisions in the drawing specifications, the selection process should be repeat. M+S is not responsible for any possible errors on the drawings.

Design: M+S

Check:



MR200SHUP

Scale


Sheet

Rev.

Weight

Date 13.02.2023



8 [17.6]





Standard Rotation
Viewed from Shaft End

Port A Pressurized - CW
Port B Pressurized - CCW



omit: Oval mount, two holes

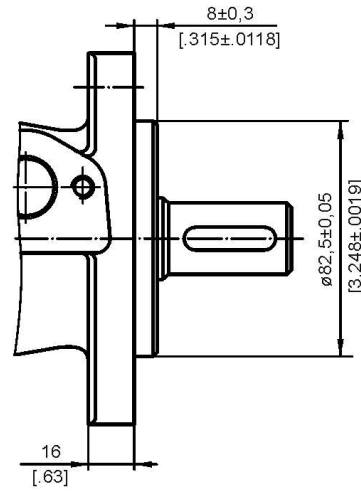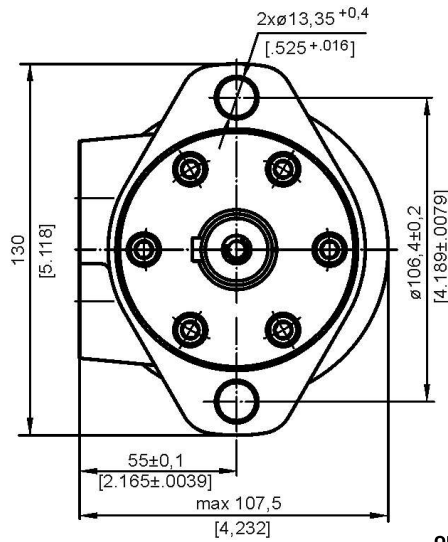

omit: Side ports

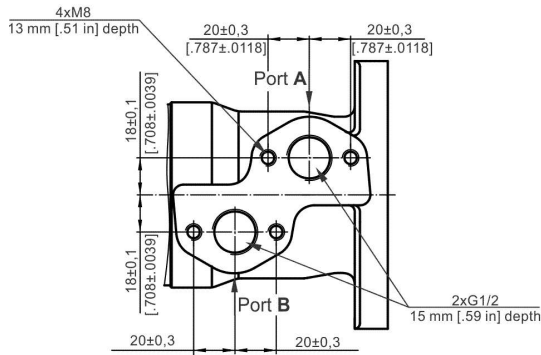

SH: Ø25,32 splined BS 2059 (SAE 6B)

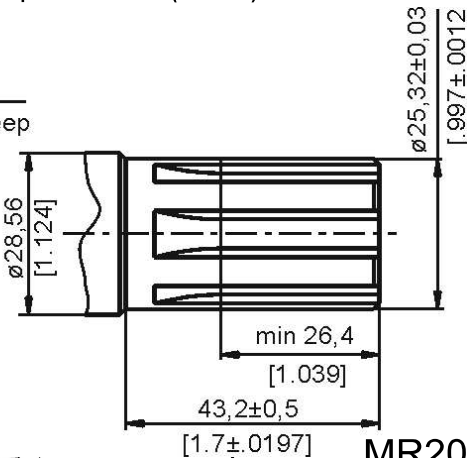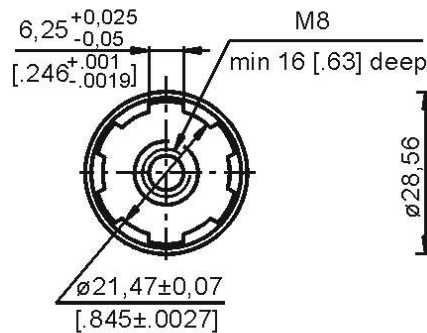

Confidential property of M+S
Please note that this drawing is generated based on the selection. In case of possible changes or revisions in the drawing specifications, the selection process should be repeated. M+S is not responsible for any possible errors on the drawings.

Design: M+S

Check:


M+S HYDRAULIC

MR200SHUP

Scale	Sheet	Rev.	Weight
Date 13.02.2023			8 [17.6]




MR200SHUP

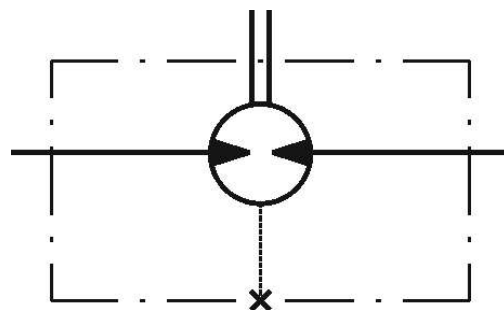

The shaft seal pressure equals the pressure in the drain line.

FUNCTION DIAGRAMS

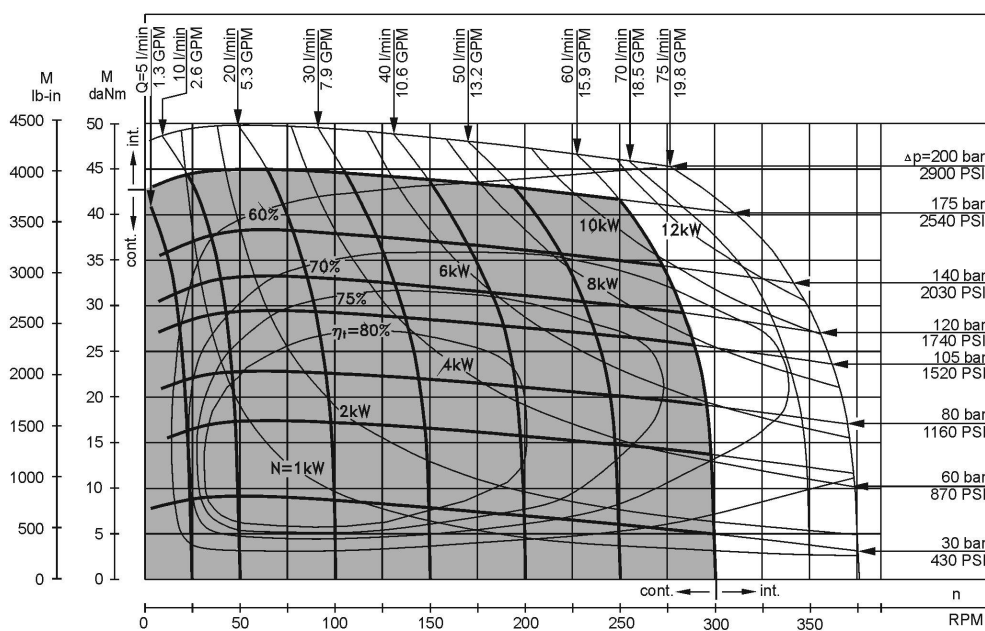


The function diagrams data is for average performance of randomly selected motors at back pressure 5+10 bar [72.5+145 PSI] and oil with viscosity of 32 mm²/s [150 SUS] at 50°C [122°F].

MR200SHUP

DATA SHEET

Pressure Losses

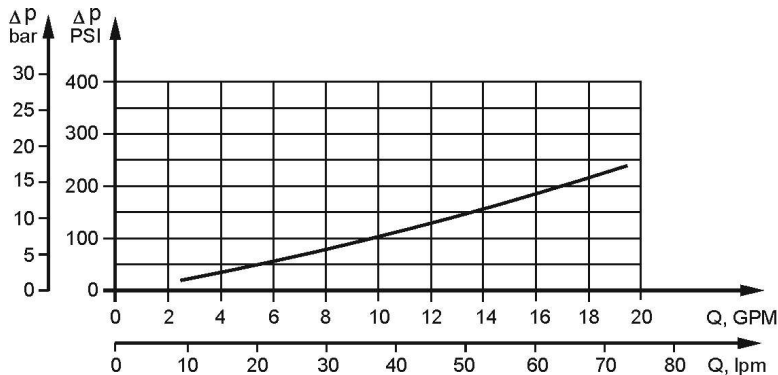


Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm ² /s [SUS]	Oil flow in drain line lpm [GPM]
100 [1450]	20 [98]	2,5 [.660]
	35 [164]	1,8 [.476]
140 [2030]	20 [98]	3,5 [.925]
	35 [164]	2,8 [.740]


MAX: PERMISSIBLE SHAFT SEAL PRESSURE

Max. return pressure without drain line or max. pressure in the drain line

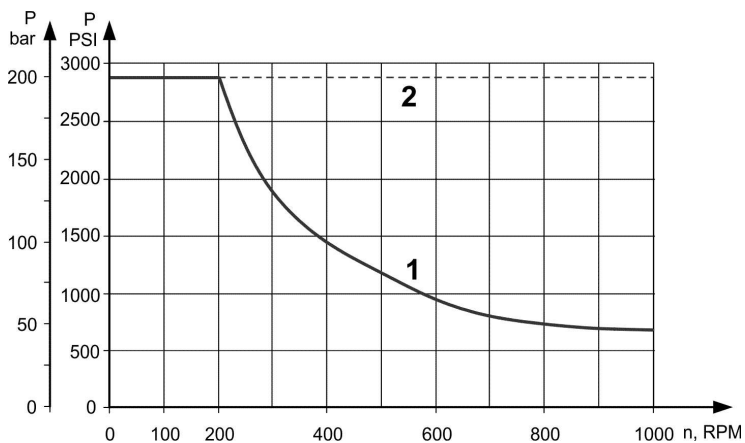

Black Curve shows continuous operations.
Dashed Curve shows intermittent operations.

PERMISSIBLE SHAFT LOADS

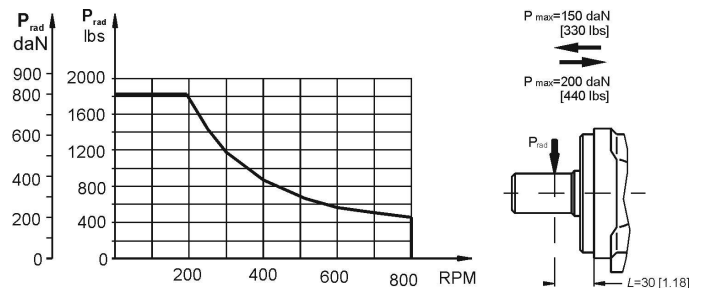

Radial Shaft Load P_{rad} for C,CO Shaft Extensions by
L=30mm[1.81in]

Standard Motor - The standard motor mounting flange is located as close to the output shaft as possible. This type of mounting support the motor close to the shaft load. This mounting flange is also compatible with many standard gear boxes.